


• HCX-5FA Series 5.0X3.2X1.40 mm

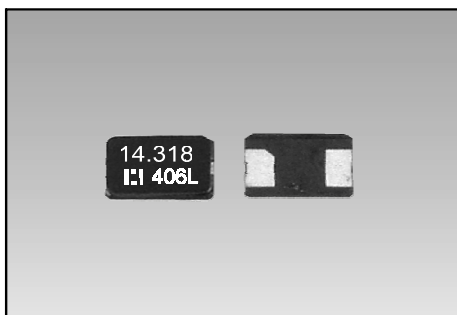

FEATURES


- Prepared frequencies can meet most of bluetooth chipsets
- Excellent electric performance optimum for mobilephone and bluetooth applications are exhibited
- Excellent heat resistance and shock resistance.
- Products that are lead-free. These can meet the requirement of re-flow profiling using lead-free solder

Electrical Specifications

Item	Type	HCX-5FB				
		8 to 9.999MHz	10 to 19.999MHz	20 to 29.999MHz	30 to 47.999MHz	48 to 80.000MHz
Frequency Range	F0	8 to 9.999MHz	10 to 19.999MHz	20 to 29.999MHz	30 to 47.999MHz	48 to 80.000MHz
Mode of Vibration		Fundamental				3 rd Overtone
Load Capacitance	CL	10pF to Series				
Frequency Tolerance	$\Delta F/F0$	$\pm 15\text{ppm}, \pm 30\text{ppm}, \pm 50\text{ppm}$ (At 25°C)				
Equivalent Series Resistance	ESR	100 Ω max.	80 Ω max.	70 Ω max.	50 Ω max.	70 Ω max.
Temperature Stability	TC	$\pm 30\text{ppm}, \pm 50\text{ppm}$ (Refer to 25°C)				
Operating Temperature Range	T _{OPR}	-20~+70°C, -30~+85°C Option				
Storage Temperature Range	T _{STG}	-55~+125°C				
Shunt Capacitance	C0	7pF max.				
Insulator Resistance	IR	500M Ω min. (At 100V _{DC})				
Drive Level	DL	100 μ W (300 μ W max.)				
Aging	Fa	$\pm 5\text{ppm}$ max. (At 25°C, First year)				
Packing Unit		1000pcs/reel				

**Please contact us for inquiries regarding other Specifications

Mechanical Dimensions(mm)

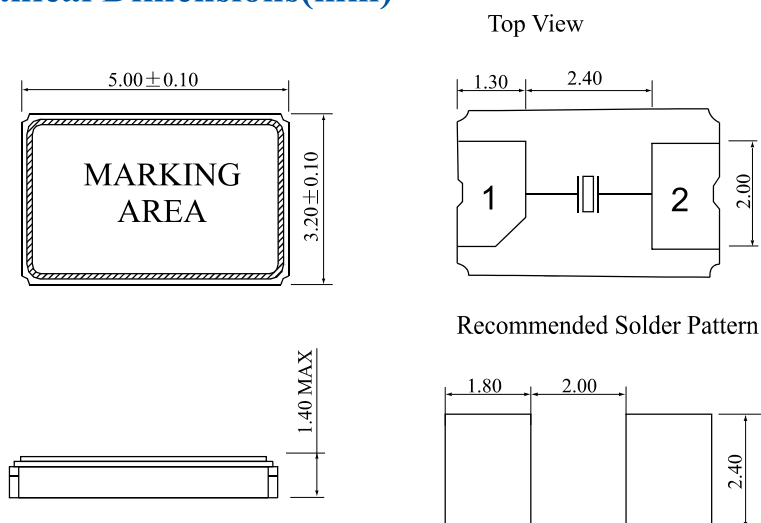

TAIWAN:

HOSONIC ELECTRONIC CO., LTD.
23-1 LANE 84, CHUN YING ST. SHULIN CHEN.
TAIPEI 23804, TAIWAN
WEB SITE: <http://www.hosonic.com>

☎ : 886-2-86875200
☎ : 886-2-26816456
✉ : hosonic.sales@hosonic.com

CHINA:

HANGZHOU HOSONIC ELECTRONIC CO., LTD.
NO.242 LIANGBO ROAD, LIANGZHU TOWN.
YUHANG DISTRICT, HANGZHOU, ZHEJIANG, CHINA
WEB SITE: <http://www.hosonic.com>

☎ : 86-571-88778189
☎ : 86-571-88778857
✉ : hosonic.sales@hosonic.com

Specifications are subject to change without notice